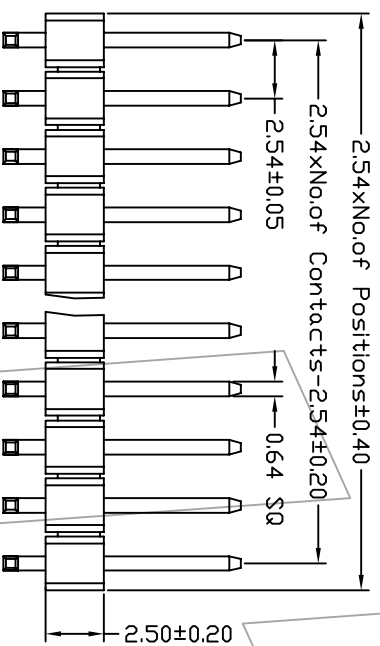
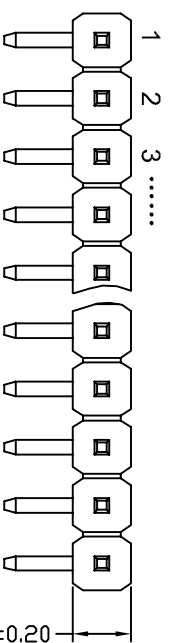


PCB LAYOUT

SPECIFICATIONS:

Current Rating: 3.0 AMP

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000M Ω Min

Withstand Voltage: 500V AC/minute

Operation Temperature: -40°C to +105°C

MATERIALS:

Contact Material: Copper Alloy

Contact Plating: Gold or Tin over 50u" Ni

Insulator Material: Polyester +30% G.F (UL94V-0)

Ordering Information

1325 - 11 XX XXX R X X X - 3

Number of Pins:

Per Row:01~40

Pin Length: —

$$L = A + D + C + 3.75$$

Contact Plated:

0=Tin 1

2=Gold 3u" 3

4=Gold 10u" 5
6=Gold 30u"

0-000000

Insulator Material:

1=PA6T

$$\begin{aligned} 2 &= PA91 \\ 3 &= ICB \end{aligned}$$

4=PBT

Item(项目)	Pin Length	A	D	C
Standard(标准)	13.80	6.00	1.20	3.00
Custom(定制)				

[illegible]