
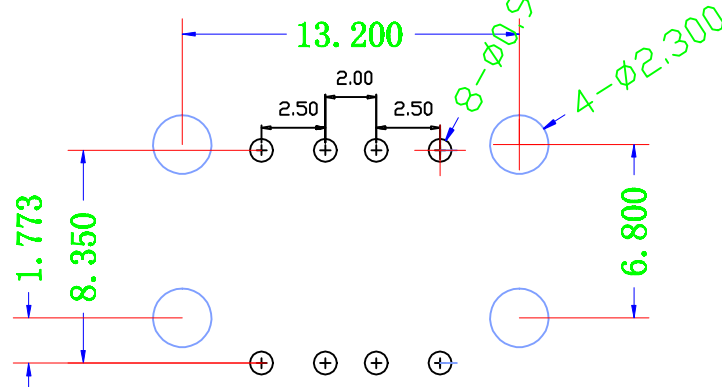
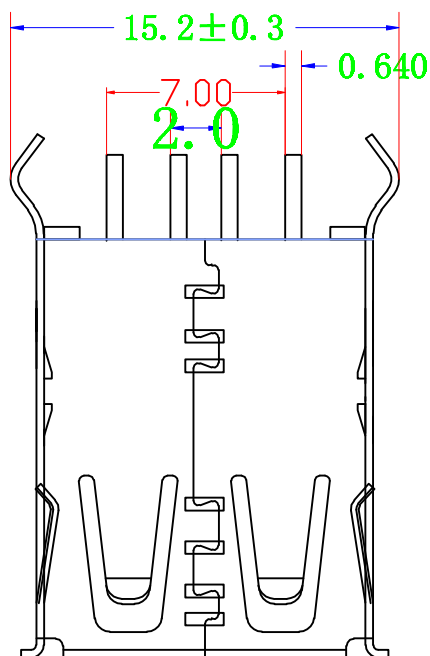


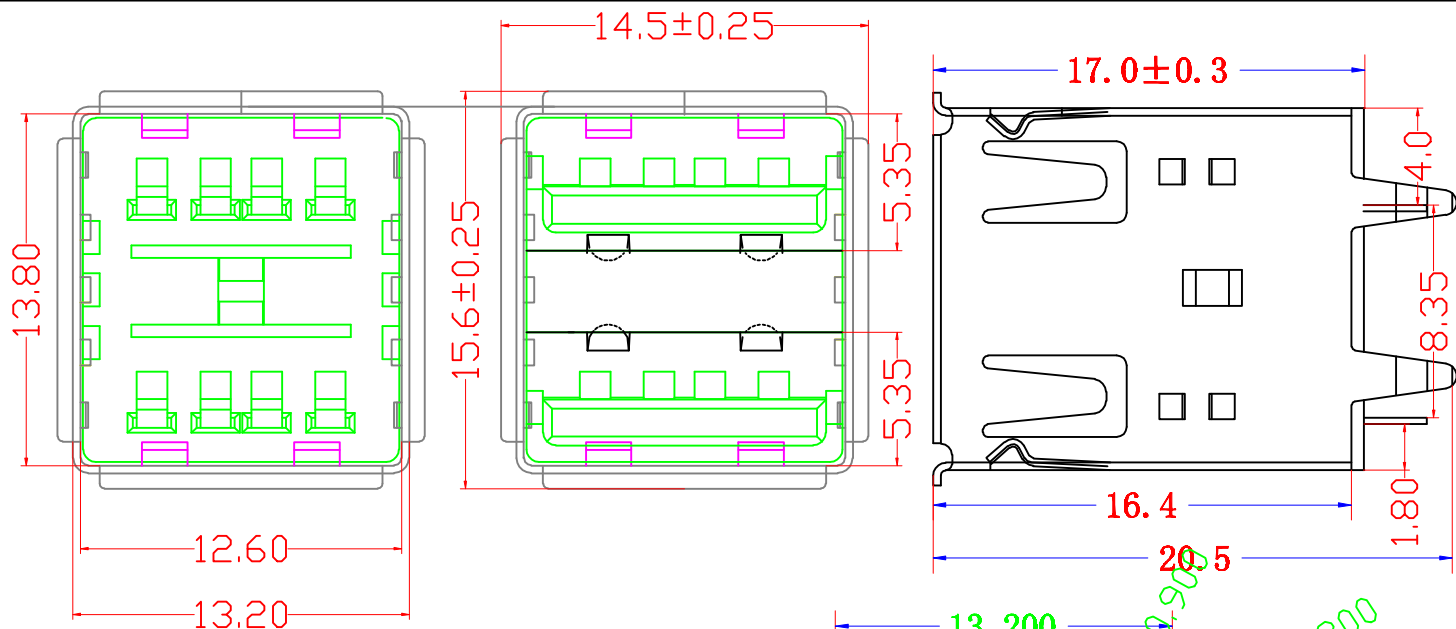

RECOMMENDED P.C.B. PATTERN LAY OUT

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,
PBT White/Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating

无锡联庭电子科技有限公司


UNLESS OTHERWISE
SPECIFIED TOLERANCE

.X ±0.20
.XX ±0.15
.XXX ±0.10
ANG. ±2°

RAWN
H.Q.huocv

APPROVED

DATE



UNIT
MM

SCALE
3/1

SIZE
A4

TITLE USB AF 双层直插17.0MM弯脚

PART NO.

DOC. NO.

REV.
A