


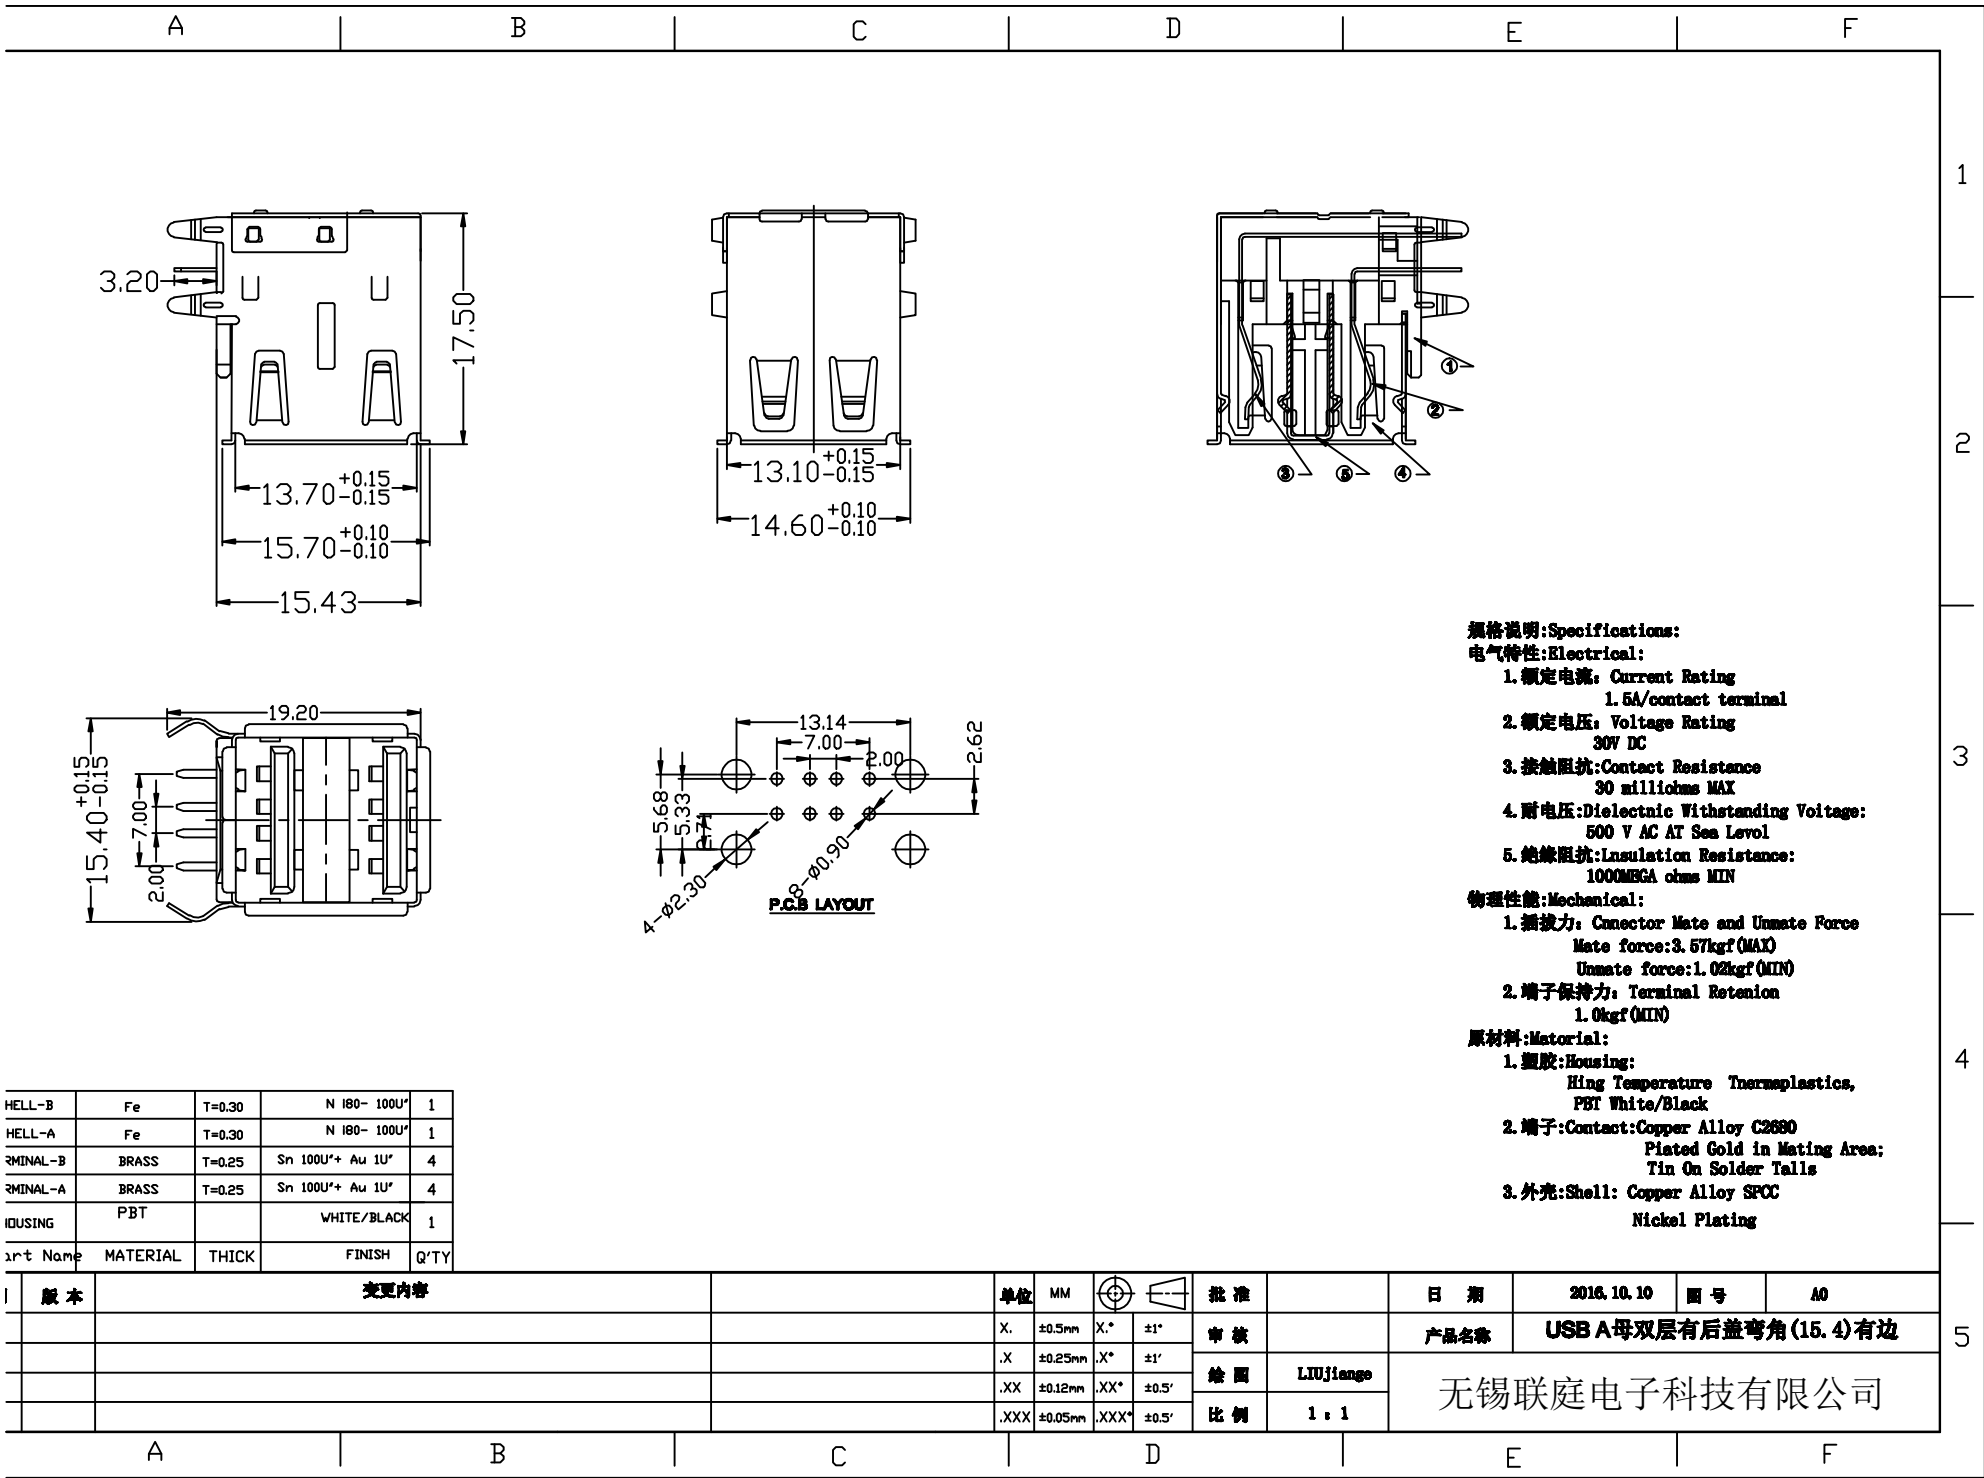

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.0kgf (MIN)

原材料:Material:

1. 塑胶: Housing:
Hing Temperature Thermoplastics,
PBT White/Black
2. 端子: Contact: Copper Alloy C2680
Plated Gold in Mating Area;
Tin On Solder Falls
3. 外壳: Shell: Copper Alloy SPCC
Nickel Plating

HELL-B	Fe	T=0.30	N 180- 100U*	1
HELL-A	Fe	T=0.30	N 180- 100U*	1
RMINAL-B	BRASS	T=0.25	Sn 100U*+ Au 1U*	4
RMINAL-A	BRASS	T=0.25	Sn 100U*+ Au 1U*	4
HOUSING	PBT		WHITE/BLACK	1
Part Name	MATERIAL	THICK	FINISH	Q'TY

版本	变更内容	单位	MM		批准	日期	2016.10.10	图号	A0
		X.	±0.5mm	X.*	±1*	审核	产品名称	USB A母双层有后盖弯角(15.4)有边	
		.X	±0.25mm	.X*	±1*	绘图	LIUjiange	无锡联庭电子科技有限公司	
		.XX	±0.12mm	.XX*	±0.5*	比例	1 : 1		
		.XXX	±0.05mm	.XXX*	±0.5*				