

REV.	ECN NO	LTR	DESCRIPTION	REVISER	DATE
------	--------	-----	-------------	---------	------

规格说明: Specifications:
电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
1000MΩCA ohms MIN

物理性能: Mechanical:






- 插拔力: Connector Mate and Umate Force
Mate force: 3.57kgf (MAX)
Umate force: 1.02kgf (MIN)
- 端子保持力: Terminal Retention
1.0kgf (MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Thermoplastics,
U1 94V-0 LCP White/Black
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
- 外壳: Shell:
Nickel Plating

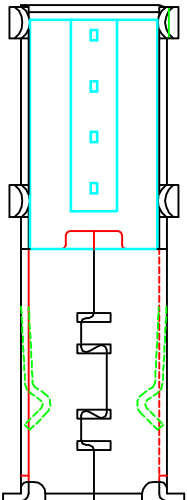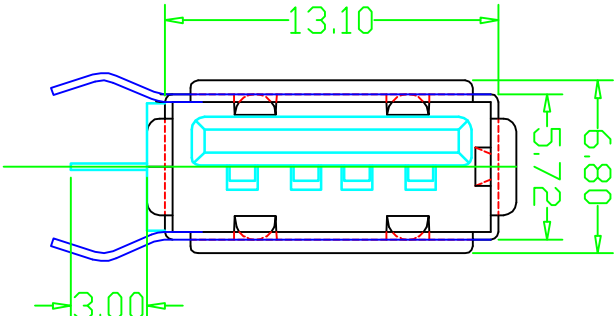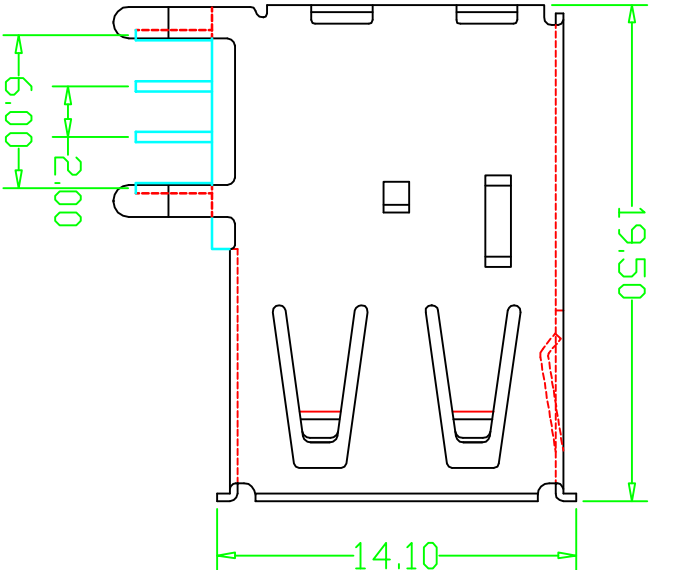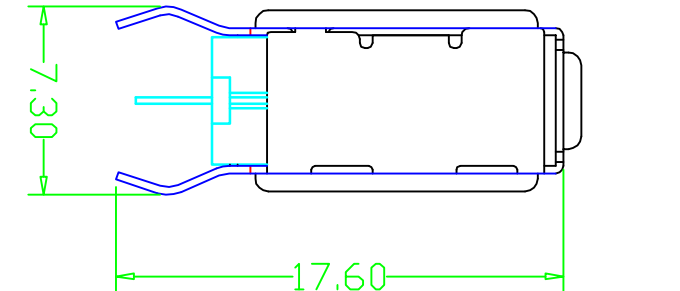

RECOMMENDED PCB LAYOUT

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

公差一览表	TOLERANCE UNLESS OTHERWISE
X. ±0.25	X. ±5.°
.X ±0.20	.X ±2.°
.XX ±0.15	.XX ±1.°
.XXX ±0.10	.XXX ±0.5°

无锡联庭电子科技有限公司

单位	UNIT	MM	制图	DRAWING	Z-Y-B	制图料号	PRODUCT PART NO.
比例	SCALE	1:1	审核	CHKD		产品名称	USB A/F 侧插长体
日期	DATE	2016.11.9	核准	APPD		角法	版本
						VIEW	VER
							A0