
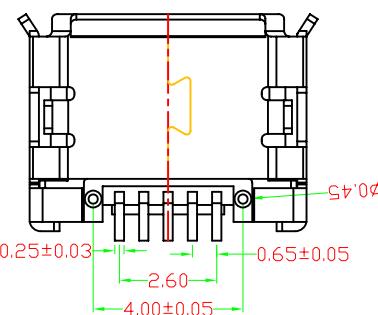
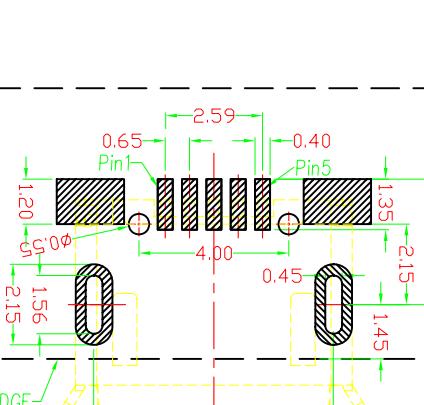
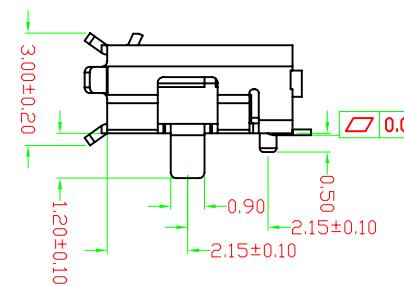
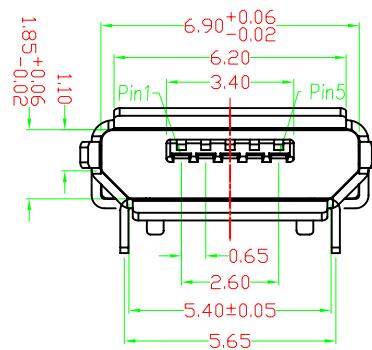




1 2 3 4 5 6 7

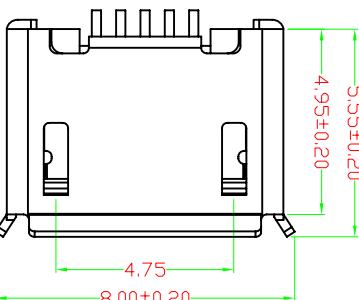

BOM: RECOMMENDED PCB LAYOUT

3			
2			
1			
ECN NO.	DESCRZPTION	REVISER	DATE

无锡联庭电子科技有限公司

品名 (ITEM NO.) micro usb 5P Btype SMT母座(前插5,65后贴带柱)

料号 (PART NO.)

模号 (MODEL NO.)

图号 (DWG NO.)		单位 (UNIT) : MM
版本 (REV)		比例 (SCALE) 1:1
日期 (DATE)		未注公差 TOLERANCE UNSPECIFIED
		X.X ±0.30
		X.XX ±0.20
		X.XXX ±0.10
		X° ±5°
		X.X° ±2°

1. 规格:

- 1.1. 额定电流 1 A Max.
- 1.2. 耐电压: 100 V(ac) for 1 min.
- 1.3. 接触阻抗: 50 mΩ Max.
- 1.4. 绝缘阻抗: 100 MΩ Min.
- 1.5. 插入力: 3.57 Kgf Max.
- 1.6. 拔出力: 1.0 Kgf Min. 0.81~2.05 Kgf Min.
寿命测试: 10000cycles
- 1.7. 运行温度范围: -30° C~+80° C
- 1.8. 自粘性卷带包装.