


Material: Insulator:Nylon 9T(UL94V-0)
 TERMINAL:phosphor Bronze
 TERMINAL Plated:Gold over Nickel
 or Tin
 Specification
 Current rating:7A
 Instant CURRENT:10A
 Contact Resistance:30mΩ
 Insulation Resistance:100MΩ
 Dielectric Voltage:500V
 Operating Temperature:—40°~105°

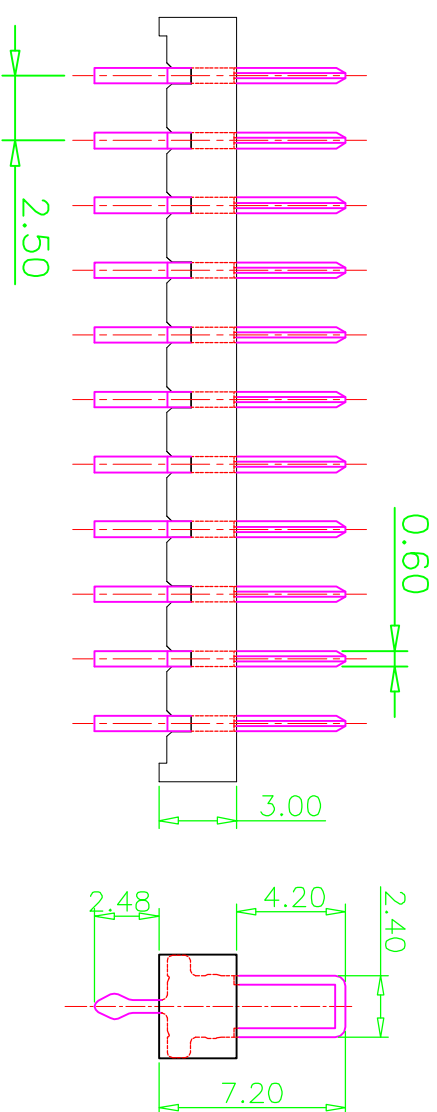

Layout Tolerance=+/-0.05mm

C 0	• MAX -0.00		• MIN 0	CIRCLED BY DATE		THIRD ANGLE PROJECTION	REUSE ON CAD ONLY	SHEET NO. 11	A4
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			APPROVED BY	DATE				