
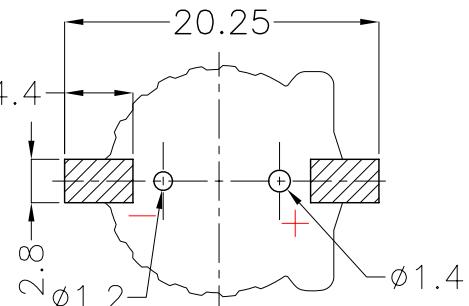
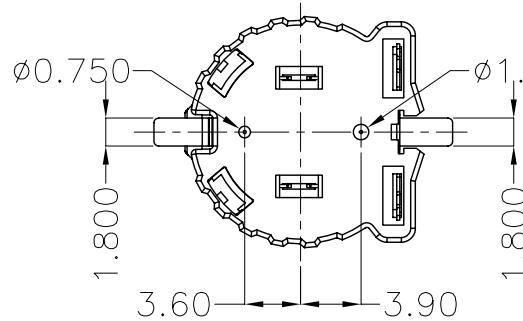

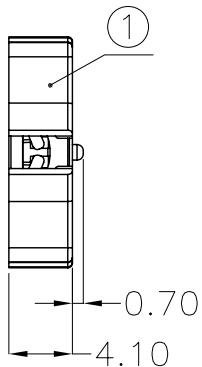


1	2	3	4	5	6	7	8
REV.	ECN NO.	REVISED	DATE				

RoHs
环保

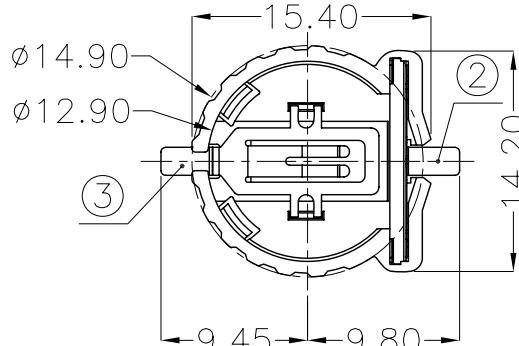

PCB Layout Diagram
Top View

3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

1. MATERIAL:

- a. HOUSING: PPA
- b. CONTACT: PHOSPHOR BRONZE
(SURFACE PLATING: Au1u")

SEE ORDERING INFORMATION

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -25°C ~ +85°C

ORDERING INFORMATION

BS-12-B***002

电池座系列

BS-12系列

SMT 180° TYPE

PLATING:
A-Au1u"
J-Ni100u"~120u"
K-Sn100u"~120u"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

无锡联庭电子科技有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCES		DSND YangFeng		DATE	2017-06-27	TITLE:
DECIMALS:	ANGLES:	X :±0.30	X :±1°	CHKD ZhouRuihai	DATE	2017-06-27
X.X :±0.25	X.X :±0.5°	X.XX :±0.20	X.XX :±0.10	APVD XueShunyong	DATE	2017-06-27
X.XX :±0.20	X.XX :±0.5°	X.XXX :±0.10	WEIGHT: 0.63g	SCALE: 2:1	SIZE: A4	VIEW:
X.XXX :±0.10				UNIT: mm	REV.: A/0	OBJECT: MY
						DRAW NO.:
						BS-12-B2AA002

1 2 3 4 5 6 7 8