
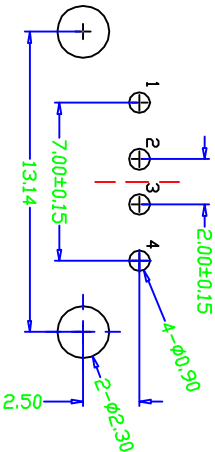
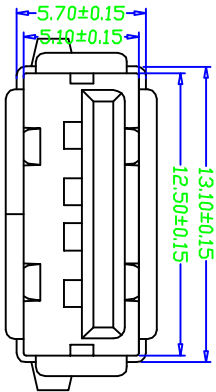
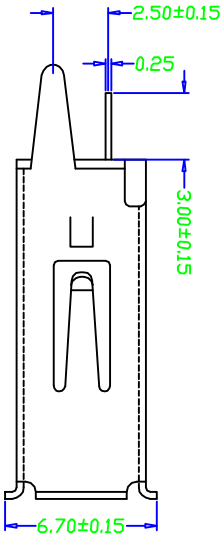


REV.	ECN NO	LTR	DESCRIPTION	REVISER	DATE
------	--------	-----	-------------	---------	------

规格说明 (Specifications):

1. 0电气特性 (Electrical):
1. 1额定电流 (Current Rating):
1. 5A/Contact Terminal
1. 2额定电压 (Voltage Rating):
- 30V DC
1. 3接触阻抗 (Contact Resistance):
- 30 Milliohms Max
1. 4耐压 (Dielectric Withstanding Voltage):
- 500 V AC AT Sea Level
1. 5绝缘阻抗 (Insulation Resistance):
- 1000MEGA Ohms Min
2. 0物理性能 (Mechanical):
2. 1插拔力 (Connector Mate And Umate Force):
- Mating Force: 3. 57kgf (Max)
- Umating Force: 1. 02kgf (Min)
2. 2端子保持力 (Terminal Retention):
1. 2kgf (Min)
3. 0原材料 (Material):
3. 1塑胶 (Housing):
- Hing Temperature Thermoplastics
- UL 94V-0 PBT/ICP White/Black
3. 2端子 (Contact):
- Copper Alloy C2680 T=0. 25MM
3. 3外壳 (Shell):
- Copper/Ferro Alloy C2680/SPCC T=0. 30MM
4. 0电镀 (Finish):
4. 1端子 (Contact):
- Plated Gold in Mating Area
- Sn≥100U" Ni≥40U" Au=1U" / 3U" / 5U" /...
4. 2外壳 (Shell):
- Nickel Plating
- 12H (Cu≥80U" Ni≥60U")
- 24H (Cu≥100U" Ni≥80U")
- 48H (Cu≥120U" Ni≥100U")
5. 0Dimension marked 层 must be controlled in QTP.

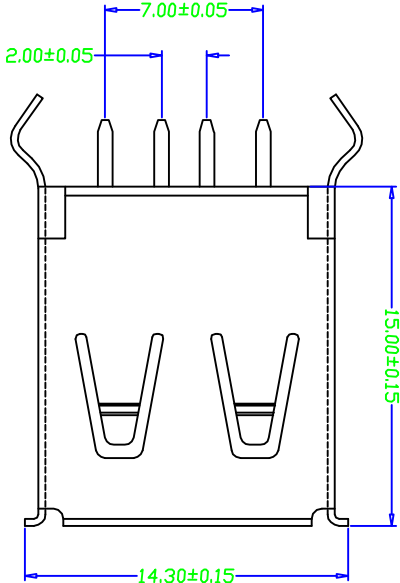

RECOMMENDED PCB LAYOUT

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

公差一览表	公差一览表	公差一览表
X.	±0.25	X.
X.	±0.20	X.
.XX	±0.15	.XX
.XXX	±0.10	.XXX

无锡联庭电子科技有限公司

单位	MM	制图	Z-Y-B	制图料号
UNIT	UNIT	DRAWING		PRODUCT PART NO.
比例	1:1	审核		产品名称
SCALE	SCALE	CHKD		PRODUCT NO.
日期	2016.04.16	核准		角法
DATE	DATE	APPD		VIEW
				版本
				VER
				A0